





LTClose 2™
LONG STEEL TAPE

30m^{13mm}
LWR 3013

DEMSS®

LTClose 2™
LONG STEEL TAPE

30m^{13mm}
LWR 3013



30m^{13mm}
LWR 3013

LTClose 2™
LONG STEEL TAPE

3:1 GEARED




www.demss.com

Applied with a special extruding process, the high performance nylon thoroughly covers the whole blade to provide it with super abrasion resistance and the anti-corrosion functions like rust-proof, anti-acid, anti-alkali as well as to prolong its life.

SUPERBLADE



End hook with pull ring

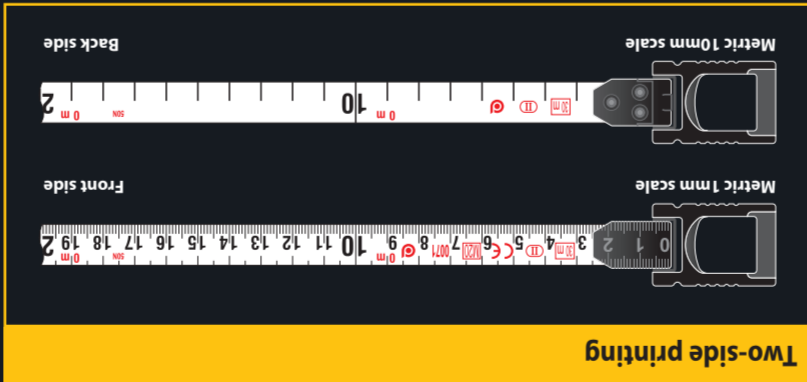

Two-side printing

DEMSS®

30m^{13mm}
LWR 3013

LTClose 2™
LONG STEEL TAPE



LTClose 2™
LONG STEEL TAPE

50m^{13mm}
LWR 5013

DEMSS®

LTClose 2™
LONG STEEL TAPE

50m^{13mm}
LWR 5013



50m^{13mm}
LWR 5013

LTClose 2™
LONG STEEL TAPE

3:1 GEARED




Applied with a special extruding process, the high performance nylon thoroughly covers the whole blade to provide it with super abrasion resistance and the anti-corrosion functions like rust-proof, anti-acid, anti-alkali as well as to prolong its life.

SUPERBLADE

www.demass.com



End hook with pull ring

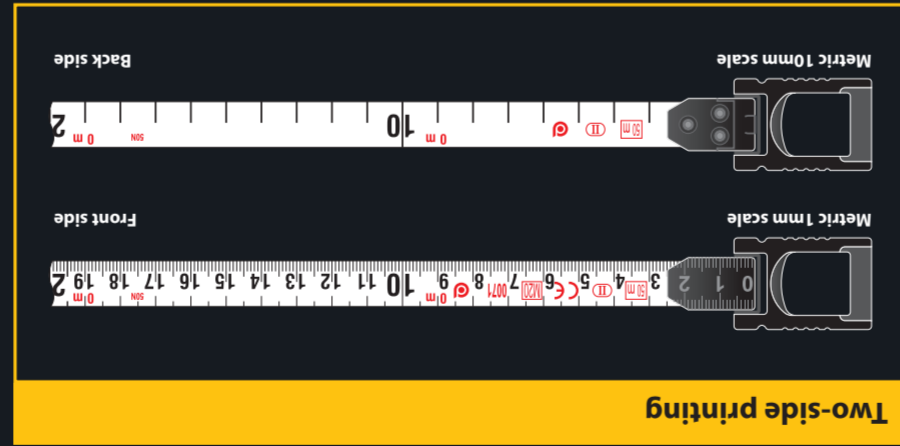


Two-side printing

DEMSS®

50m^{13mm}
LWR 5013

LTClose 2™
LONG STEEL TAPE



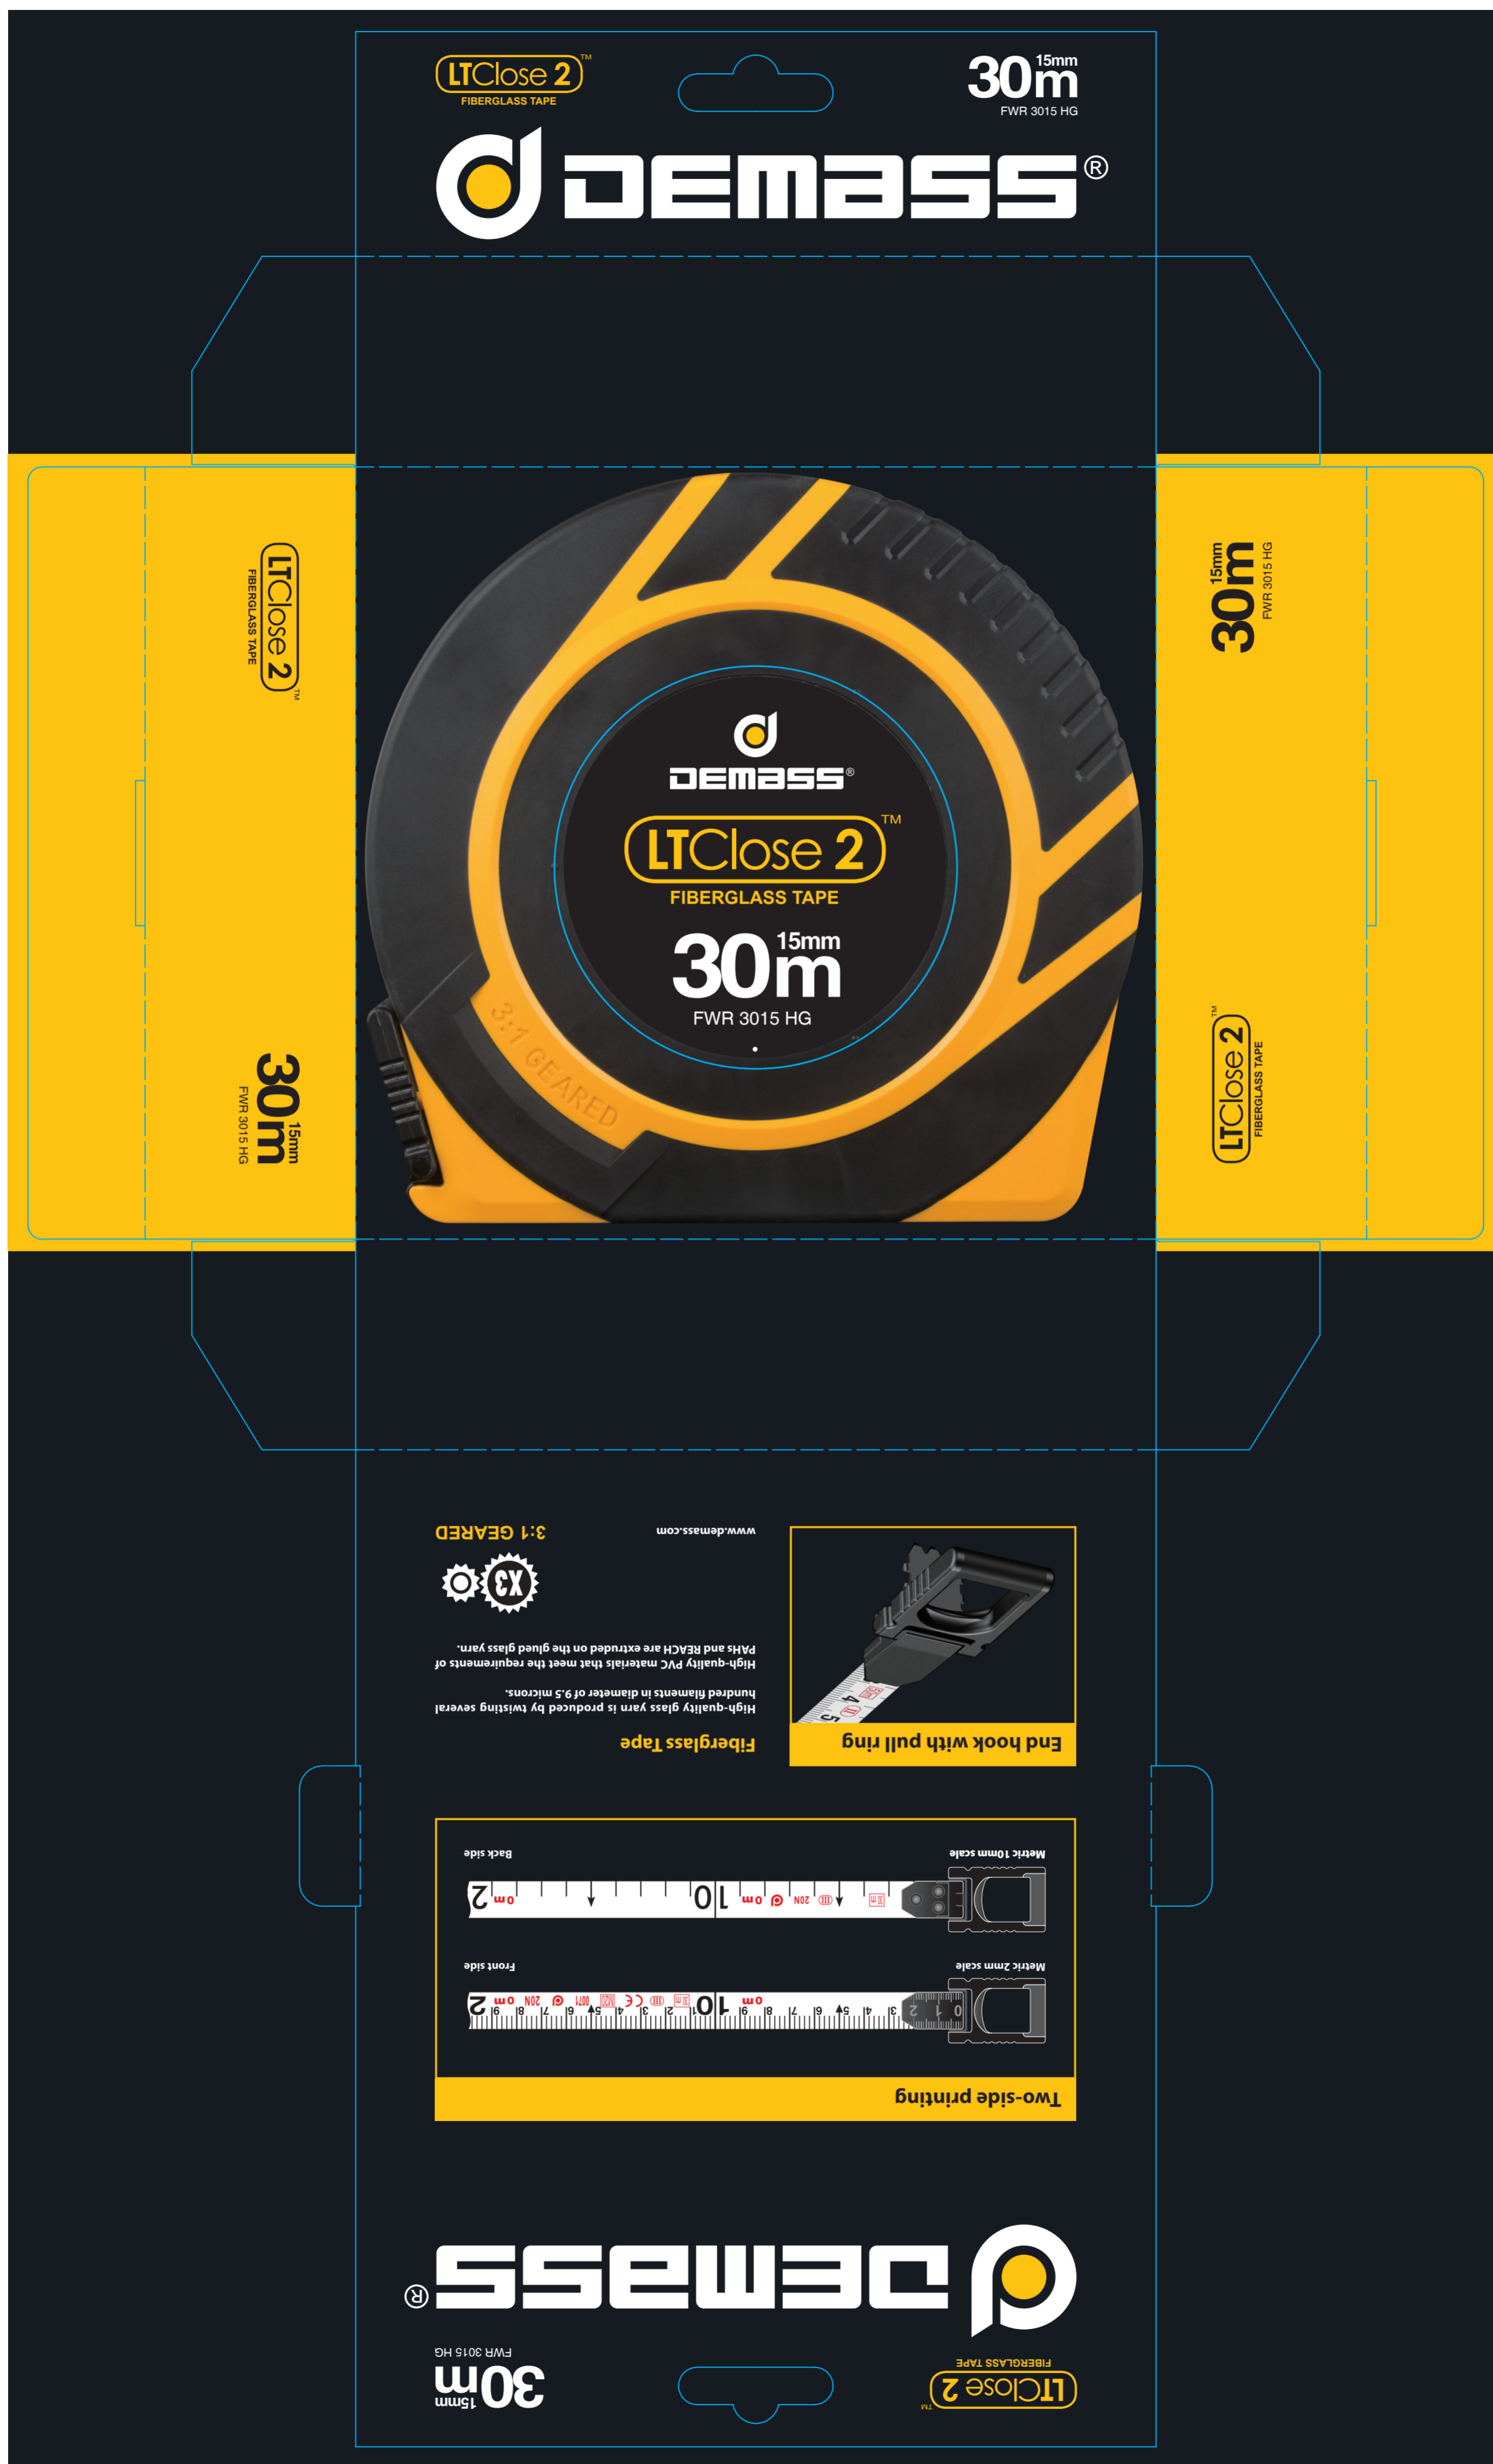

LTClose 2™
FIBERGLASS TAPE

30m^{15mm}
FWR 3015 HG

DEMSS®

LTClose 2™
FIBERGLASS TAPE

30m^{15mm}
FWR 3015 HG

30m^{15mm}
FWR 3015 HG

LTClose 2™
FIBERGLASS TAPE

3:1 GEARED




High-quality glass yarn is produced by twisting several hundred filaments in diameter of 9.5 microns. High-quality PVC materials that meet the requirements of PAHs and hCACH are extruded on the glued glass yarn.

Fiberglass Tape

www.demass.com



End hook with pull ring

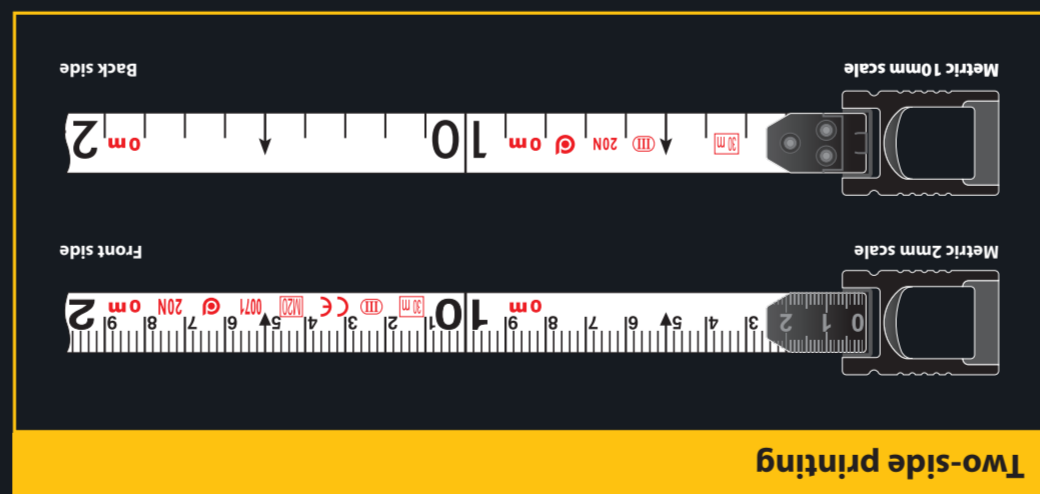

Two-side printing

DEMSS®

30m^{15mm}
FWR 3015 HG

LTClose 2™
FIBERGLASS TAPE

DEM ASS®

LTClose 2™
FIBERGLASS TAPE

50m^{15mm}
FWR 5015 HG



LTClose 2™
FIBERGLASS TAPE

50m^{15mm}
FWR 5015 HG

50m^{15mm}
FWR 5015 HG

LTClose 2™
FIBERGLASS TAPE

3:1 GEARED




Fiberglass Tape
High-quality glass yarn is produced by twisting several hundred filaments in diameter of 9.5 microns.
High-quality PVC materials that meet the requirements of PRTs and RTRCT are extruded on the glued glass yarn.

www.demass.com



End hook with pull ring

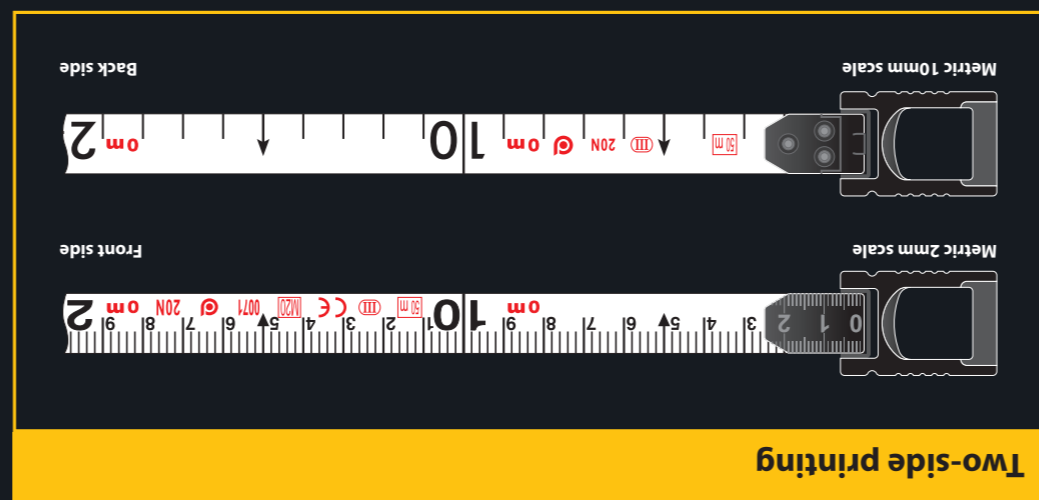

Two-side printing

DEM ASS®

50m^{15mm}
FWR 5015 HG

LTClose 2™
FIBERGLASS TAPE